EPIC BY-PASS Stall Shower Enclosure

ES-42S-38, ES-48S-38, ES-54S-38, ES-60S-38, ES-66S-38, ES-48T-38, ES-54T-38, ES-60T-38, ES-66T-38




All Units come in standard Polished Chrome Anodized (see reverse side for upgrade finishes)

GLASSCRAFTERS INC.

Acceptable Out Of Square (OOS) conditions:

For bottom base opening, 1/4" OOS from left to right. For left and right walls that accept door panels, up to 5/16" OOS.

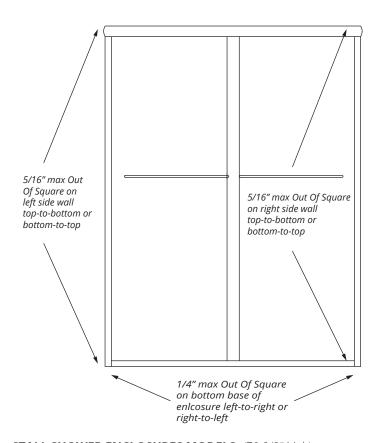

STALL SHOWER ENCLOSURES MODELS: (70 3/8" high)

ES-42S-38 36 1/8" to 42" opening ES-48S-38 42 1/8" to 48" opening ES-54S-38 48 1/8" to 54" opening ES-60S-38 54 1/8" to 60" opening ES-66S-38 60 1/8" to 66" opening Taller STALL (75 5/8" high) ES-48T-38 42 1/8" to 48" opening ES-54T-38 48 1/8" to 54" opening ES-60T-38 54 1/8" to 60" opening

ES-66T-38 60 1/8" to 66" opening

Standard Features:

- · Clear safety tempered glass.
- Standard round or optional flat header.
- Easy-clean track and side jambs.
- · Anti-lift safety brackets.
- Two standard thru-the-glass towel bars or cresent knobs avaliable.
- · Continuous rail with thru-the-glass fasteners.

Design and ordering for left hand or right hand door is not required as parts are reversable.

Custom FILLERS are available for OOS conditions beyond the range listed in this illustration. Contact GlassCrafters for more information.

Upgrades Avaliable:

- Alternative Hardware Finish Options
- Protective Glass Coating







GLASSCRAFTERS, INC. 11 York Avenue, West Caldwell, NJ 07006 1+ (888) 683-1362 (F) 1+ (201) 525-1117 sales@glasscraftersinc.com

Distinctive Designs for Selective Tastes

EPIC BY-PASS Stall Shower Enclosure

ES-42S-38, ES-48S-38, ES-54S-38, ES-60S-38, ES-66S-38, ES-48T-38, ES-54T-38, ES-60T-38, ES-66T-38




All Units come in standard Polished Chrome Anodized

GLASSCRAFTERS INC

Detail — Top View, Installed, Closed Position Glass Side Bumpers Wall Jamb 1 7/8' **-** 15/16′

Detail — Inside View, Rail with Roller



DECORATIVE HARDWARE FINISH OPTIONS



Chrome Anodized Aluminum (CHA) Standard Finish



Brushed Nickel Aluminum (BNA)



Oil Rubbed Bronze Paint (ORB)



Polished Nickel Aluminum (Sliders Only) (PNA)

Detail — Section Side View Installed

Round

Header

--1 13/16"→

211/16'' —

Anti-Lift

Safety

Bracket

Flat


Header

- 2 1/8"



(Standard) Glass

GLASS & HARDWARE



Iron-Black (IBK)


Refer to the chart on the right to select the model number that fits the Width (A) for your installation.

FOR BEST RESULTS Glasscrafters

Height is 70 3/8" or 75 5/8" - 3/8" glass

Model Number	Width (A)
	Min-Max
ES-42S-38	36 1/8" to 42"
ES-48S-38	42 1/8" to 48"
ES-54S-38	48 1/8" to 54"
ES-60S-38	54 1/8" to 60"
ES-66S-38	60 1/8" to 66"
ES-48T-38	42 1/8" to 48"
ES-54T-38	48 1/8" to 54"
ES-60T-38	54 1/8" to 60"
ES-66T-38	60 1/8" to 66"

WARNING: TO INSTALL ON CAST IRON, FIBERGLASS, ACRYLIC OR RESIN SHOWER BASE Check with the tub or shower base manufacturer to determine the tooling required.

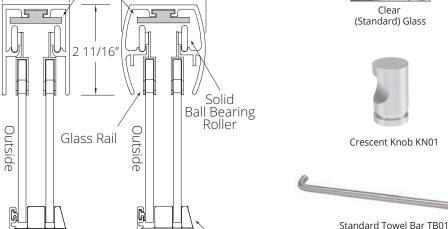

Patented

Glass Tension

Guide

recommends the installation be performed by a trained installer.

INSTALLING THESE UNITS REQUIRES 2 PERSONS

GLASSCRAFTERS, INC. 11 York Avenue, West Caldwell, NJ 07006 1+ (888) 683-1362 (F) 1+ (201) 525-1117 sales@glasscraftersinc.com

Distinctive Designs for Selective Tastes