



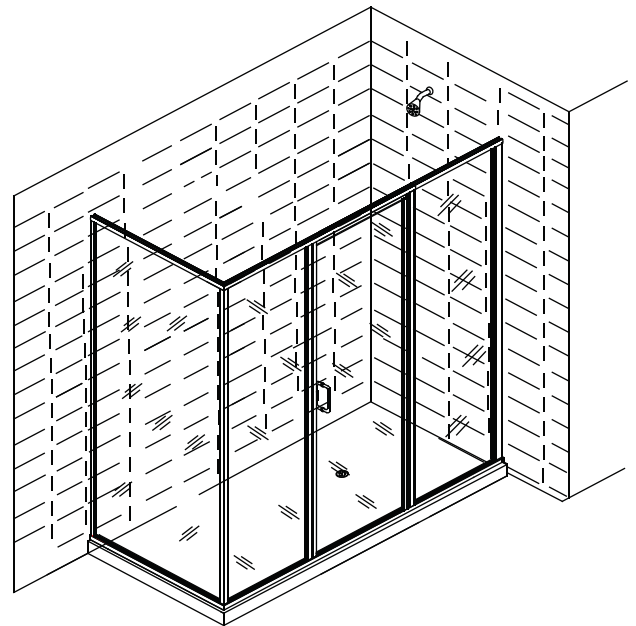
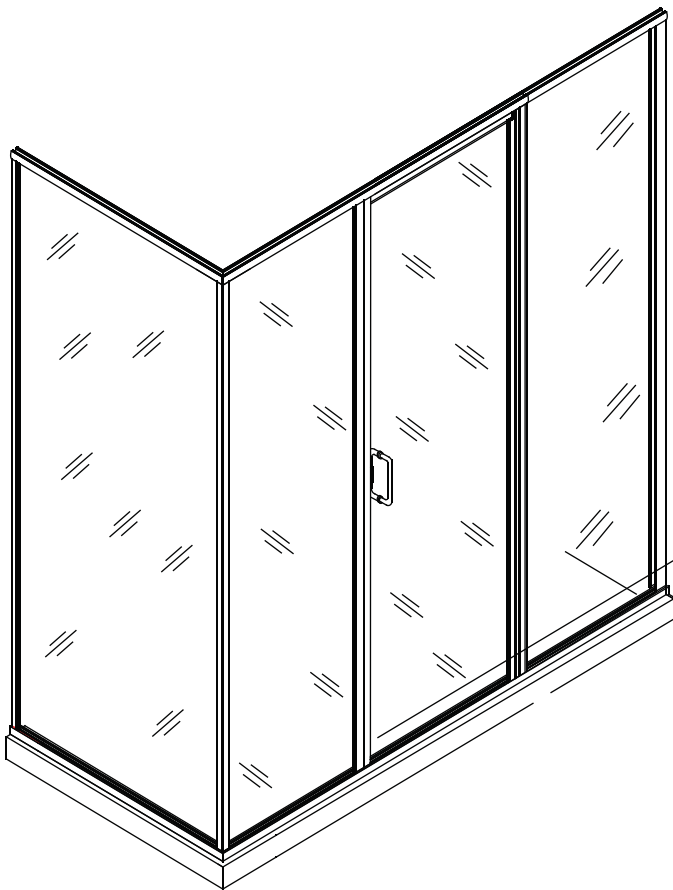
GLASSCRAFTERS INC.

GLASSCRAFTERS, INC.
193 Vetrans Blvd., Carlstadt, NJ 07072

1+ (888) 683-1362 (F) 1+(201) 525-1117
sales@glasscraftersinc.com

EPIC™ SERIES

Model Semi-Frameless Panel-Door-Panel Installation Instructions with 90 Degree Return Panel -- Model E-PDP9



IF YOU NEED REPLACEMENT PARTS OR HAVE INSTALLATION QUESTIONS,
PLEASE CALL OUR CUSTOMER SERVICE REPRESENTATIVES.
INSTALLATIONS SHALL BE MADE ACCORDING TO MANUFACTURER'S INSTRUCTIONS AND DRAWINGS.
GLASSCRAFTERS RECOMMENDS THE INSTALLATION TO BE PERFORMED BY A TRAINED INSTALLER.

888-683-1362






















READ INSTRUCTIONS BEFORE STARTING INSTALLATION

Item No.	Description	Qty	Item No.	Description	Qty
#1	Threshold	1 (2 pcs)	#11	1/2" Tek Screws	3
#2	Wall Jambs	2	#12	Header/T-hold Insert	2
#3	Anchors	6	#13	Strike Jamb	1
#4	8 x 1 1/2" Screws	6	#14	Vertical Glazing Vinyl	
#5	Setting Blocks	4	#15	Horizontal Glazing Vinyl	
#6	Bulb Seal	2	#16	Hinge Jamb	1
#7	H-Post	1	#17	Deflector	1
#8	Header	1 (2 pcs)	#18	Clamp-on Magnet and pad	1
#9	8 x 7/16 Screws	9	#19	Hinge Stile	1
#10	Slide in Magnet	1	#20	D-Pull Handle	1
			#21	90° Corner- Post	1

CAUTION: Risk of injury or product damage. Do not attempt to cut tempered glass.

IMPORTANT! Children should be supervised at all times while in Tub/Shower Enclosure.

IMPORTANT! Never use Door Handle to support yourself. This is for towels or wash cloths only.

 #1- Threshold	 #2 -Wall Jamb	 #3- Anchors	 #4- #8 x 1 1/2"  #9- #8 x 7/16"	 #5 Setting Blocks	 #6- Bulb Seal
 #7 H- Post	 #8 Header	 #10- Slide-in Magnet	 #11- 1/2" Tek Screws	 #12- Header/ T-Hold Inserts	 #13- Strike Jamb
 #14 Vertical Glazing Vinyl	 #15 Horizontal Glazing Vinyl	 #16- Hinge Jamb	 #17- Deflector	 #18- Clamp-on Metal Pad / rubber	 #19- Hinge Stile
 #20 - 6" D-pull	 #21 90° Corner- Post				

Please Note:

- * Parts #6, #10, #16, #19, and the Door Glass are pre-assembled in factory.
- * Part #20 - Standard D-pull. Additional handles are available.
- * Part # 18 - Included in the package with wrap around black rubber pad.
- * Please contact Customer Service with replacement parts requests. When ordering replacement parts, please specify the Model Number, Item Number & Part Description.
- * Save Installation Instructions For Future Reference And In The Event You Need To Order A Replacement Part.

PLEASE STOP THE INSTALLATION AND CONFIRM WITH FACTORY IF THE ACTUAL NUMBER OR TYPE OF PARTS IS DIFFERENT.

Tools Required - For installation of Your Shower Enclosure:

A - Safety glasses.

B - Measuring tape.

C - Pencil.

D - Hacksaw
(with 32 teeth per inch blade).

E - Miter Box or Square.

E - Chop saw with carbide
Tooth blade.

F - Level.

G - Electric Drill.

H - Center Punch

I - Drill bit, 1/8"
(for installation on
fiberglass enclosures)

I* - Drill bit, 3/16" masonry
(for installation on ceramic
tiles or marble)

J - Drill Bit #29, for drilling
screws #9 and #11.

K - Power screwdriver

L - #2 Phillips screwdriver

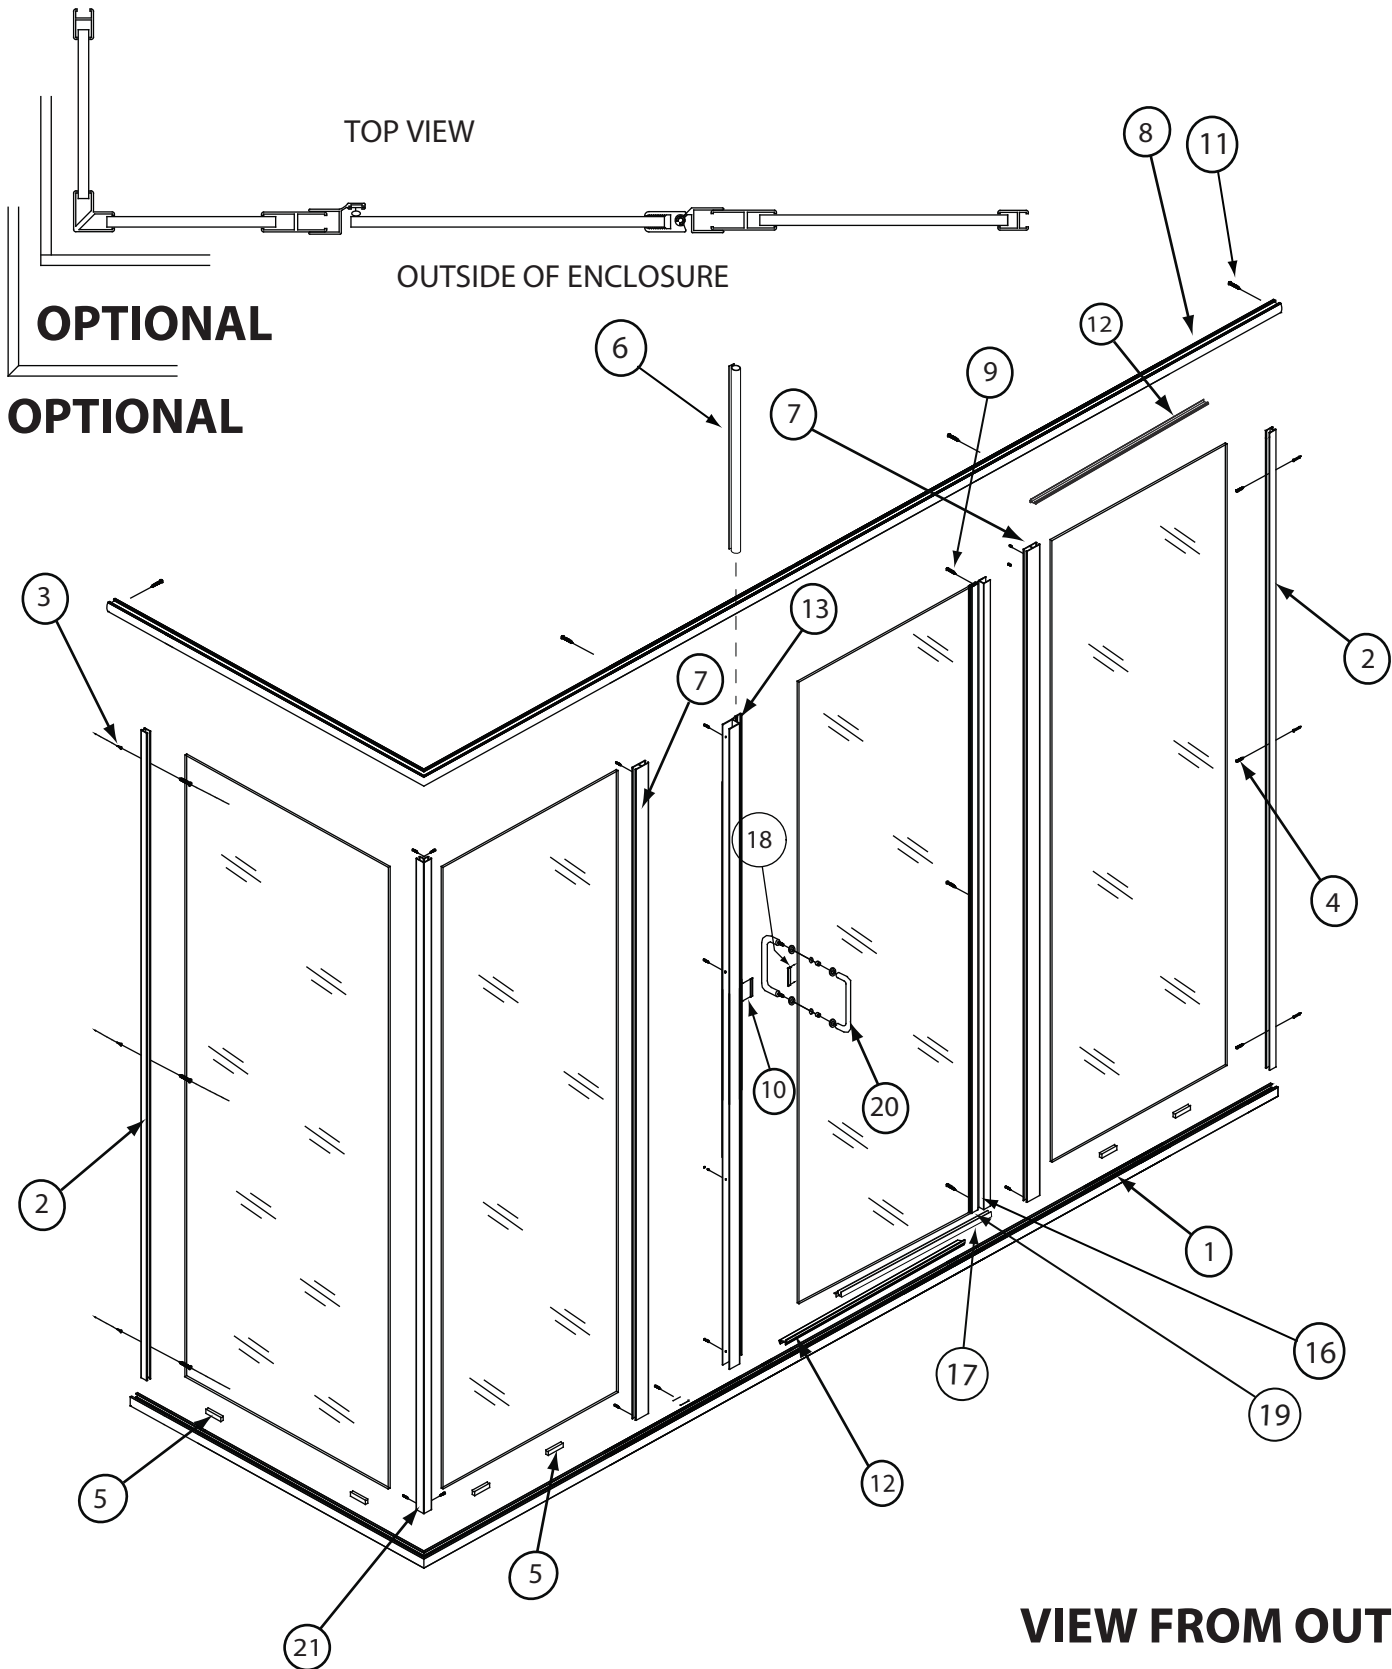
M - Caulking gun

N - Block of wood or
Glazing block

O - Wooden shims

P - Silicone

Q - Masking Tape



Installation Instructions for GlassCrafters Semi-Frameless Epic Panel Door Panel with 90 Degree Return Panel

IMPORTANT: Read all instructions carefully and become familiar with all parts before installation.

Unpacking: Care should be taken unpacking your Shower Enclosure. Place the Glass Panels in an upright, Safe location to avoid damage. Never place glass directly on hard surface.

A Box cutter should not be used to open box.

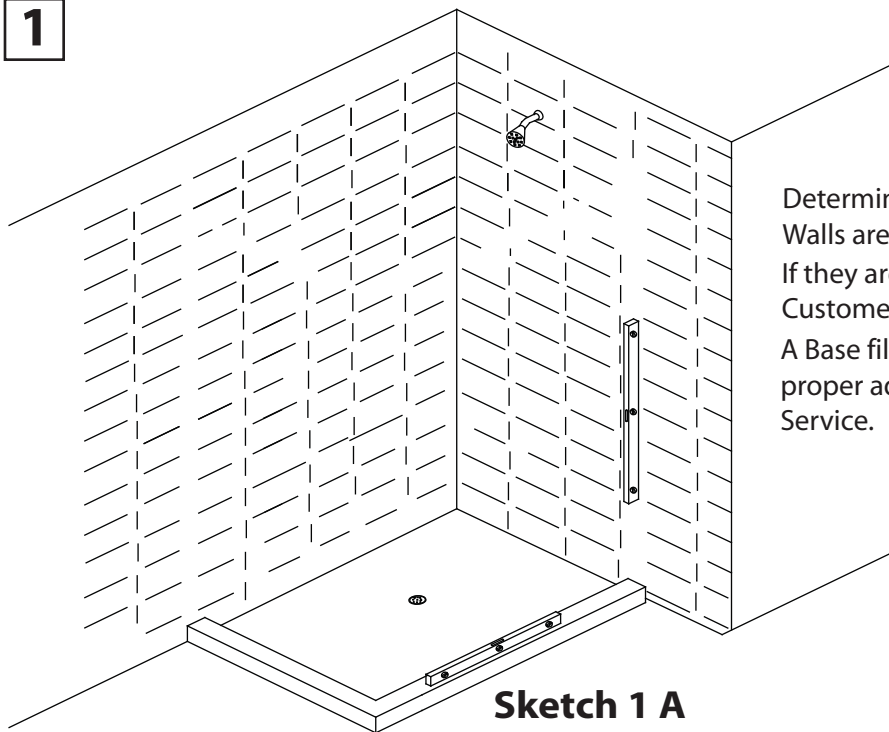
Please remove all staples from the box prior to unpacking metal and glass.

Cleaning: Never use scouring powder, pads or sharp instruments on metal work or glass panels. We recommend the use of a squeegee after each shower to eliminate water spots on the inside of the glass panels.

An occasional wiping down of the glass panels and anodized aluminum parts with a mild detergent, diluted in water, is all that is needed to keep your Shower /Tub Enclosure looking brand new.

Please Note; this Shower Enclosure Door ONLY swings outward. Be sure to allow room for the door to open.

1



Determine if your Tub/Shower Stall Enclosure ledge is Level & Walls are plumb as shown in Sketch 1A.

If they are out of level/Plumb by more than 1/4" , STOP and call Customer Service.

A Base filler and /or Wall Jamb Filler is recommended for obtaining proper adjustment; both are available through Customer Service.

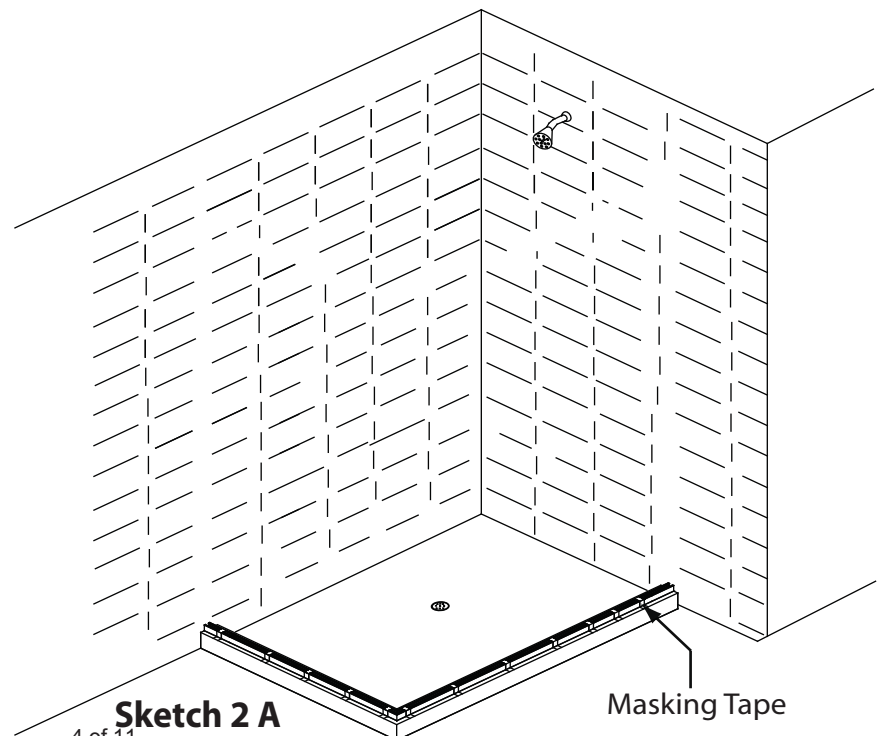
Sketch 1 A

2

Threshold (1) is cut to size at the factory.


Place Threshold #1 into position and temporarily secure it with masking tape as shown in **Sketch 2A**

If Threshold does not fit do not attempt to re-cut it. Contact Manufacturer for assistance.



Sketch 2 A

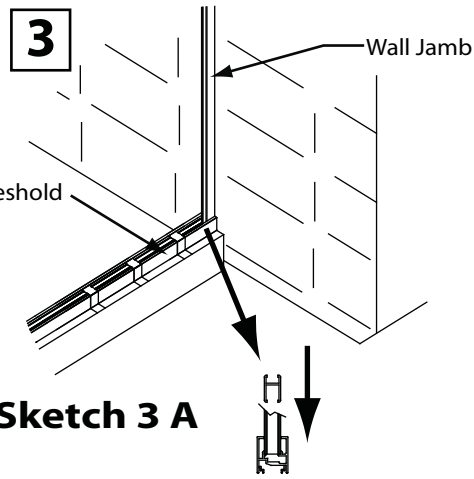Masking Tape



Sketch 3 A

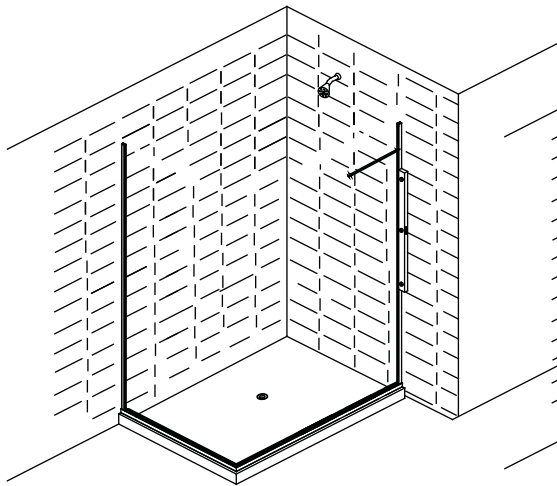
Carefully position the Wall Jamb into the Threshold, as shown in **SKETCH 3A**. Be careful not to move the temporary position of the Base.

Use a level to plumb the Wall Jambs, as shown in **SKETCH 3B**


Mark the three mounting hole locations for each Wall Jamb.

Remove Wall Jamb and Threshold. Drill marked mounting holes and insert wall anchors as shown in **Sketch 3 C**.


Apply a generous amount of Silicone to underside of Threshold and in each corner to prevent Water leakage. Clear the Base of any dust or Tile Particles and Place Threshold into position. Insert Wall Jamb into Threshold and secure them to the walls with screws # 4 as shown in **Sketch 3D**



Sketch 3 B

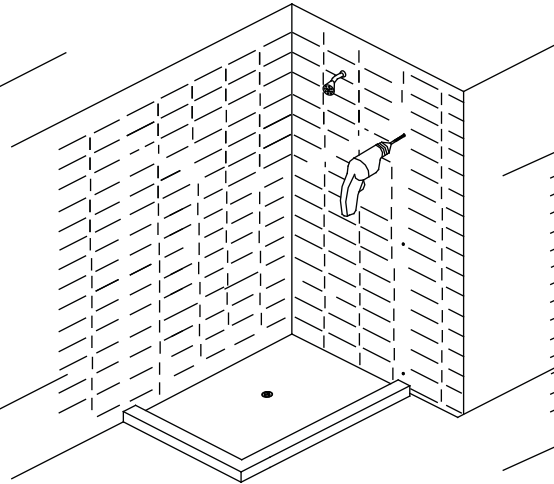

Sketch 3 C

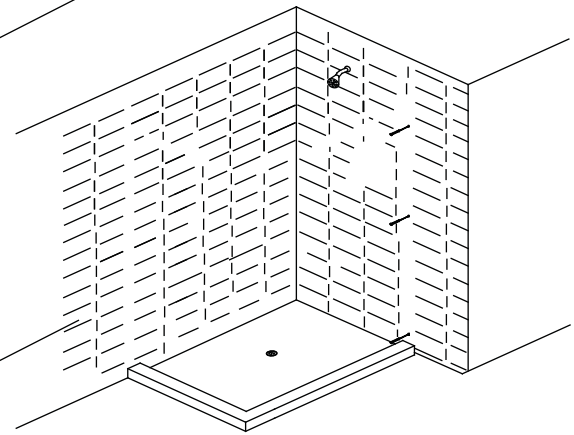


Sketch 3 D

4 Flip Threshold over and apply Silicone Sealant to areas shown in **Sketch 4A**.


Clean the base from dust and tile particles.

Place Threshold into position and temporarily secure it with masking tape. Apply a Layer of Silicone to Mitered Joints and each end of base where wall channels will be positioned to prevent water leakage.

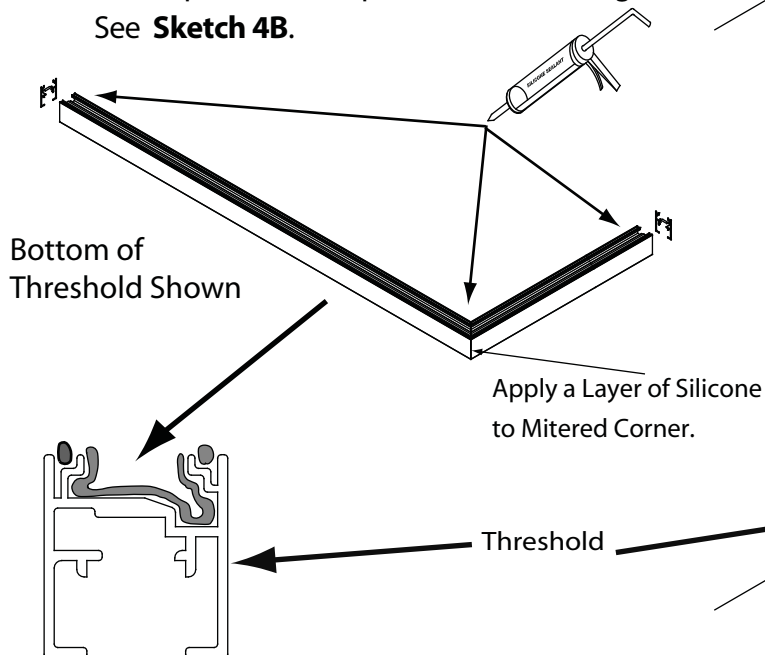See **Sketch 4B**.




Sketch 4 A

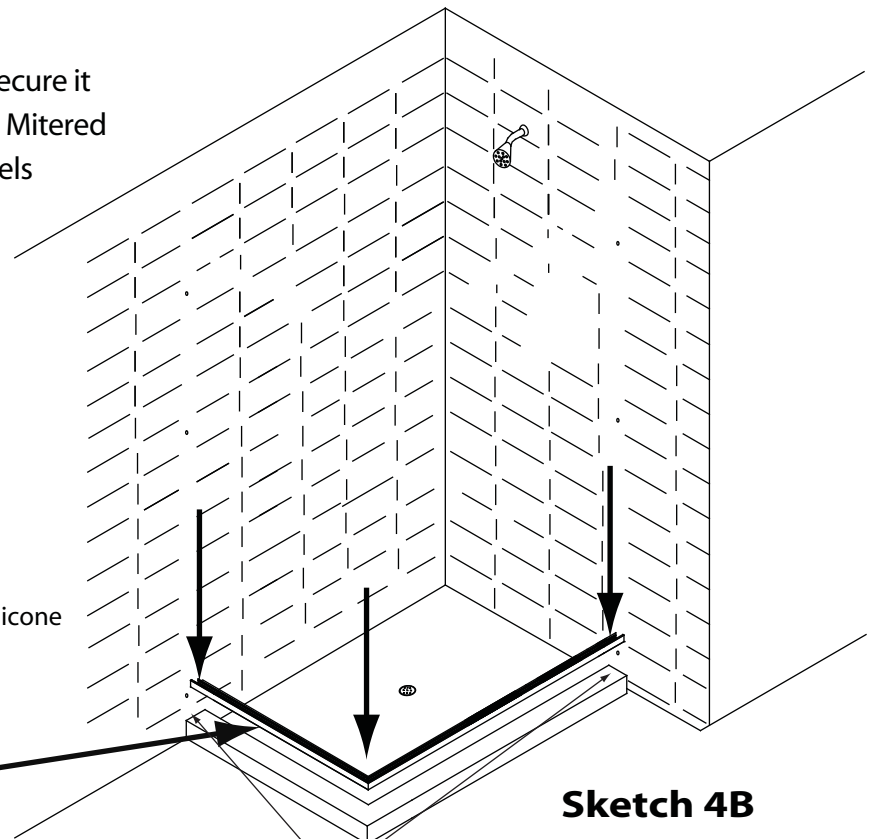


Sketch 4 B

5

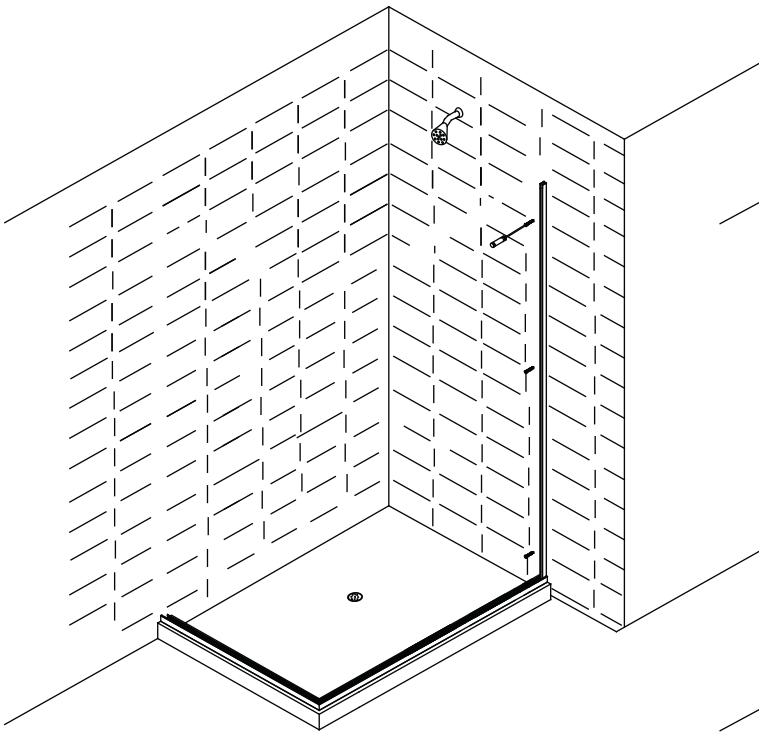Install Wall jambs as shown in **Sketch 5A** and **Sketch 5 B**.
Secure wall jambs with screws #4.



Sketch 5A

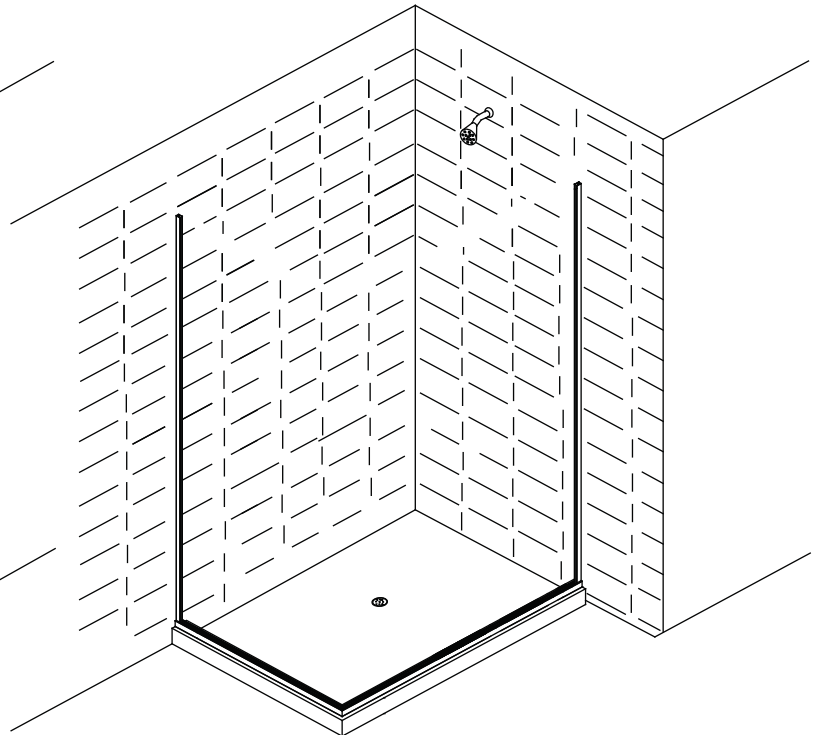

Sketch 5B

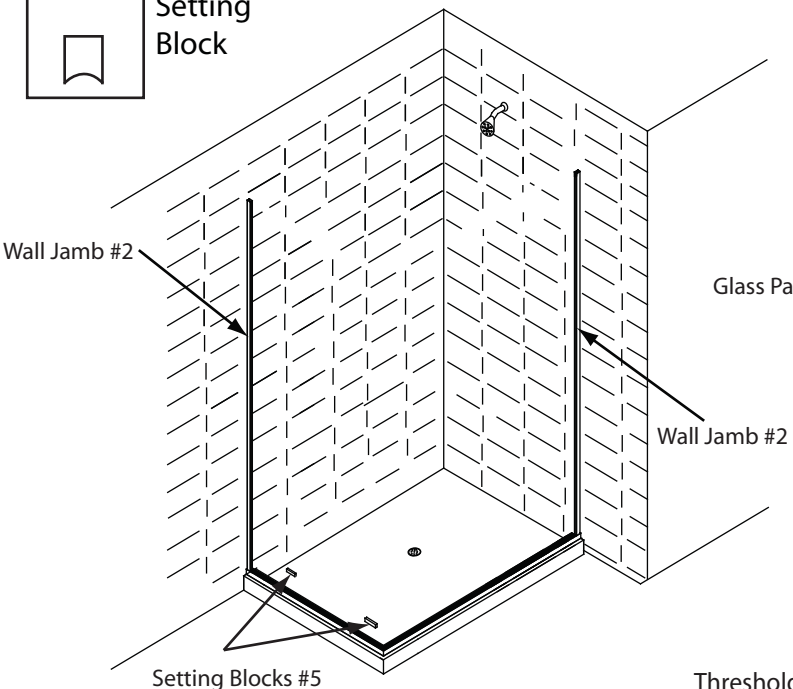
6

With Threshold # 1 and Wall jambs #2 installed, insert Setting Blocks #5 as shown in **Sketch 6A** with arch facing downward.


Place Glass Panels spaced evenly into position as shown in **Sketch 6B**. **Be careful not to chip or strike glass edges.** Glass can break if edges are not handled properly. Set the Corner Post #21 into Threshold.



Setting Block



Sketch 6A

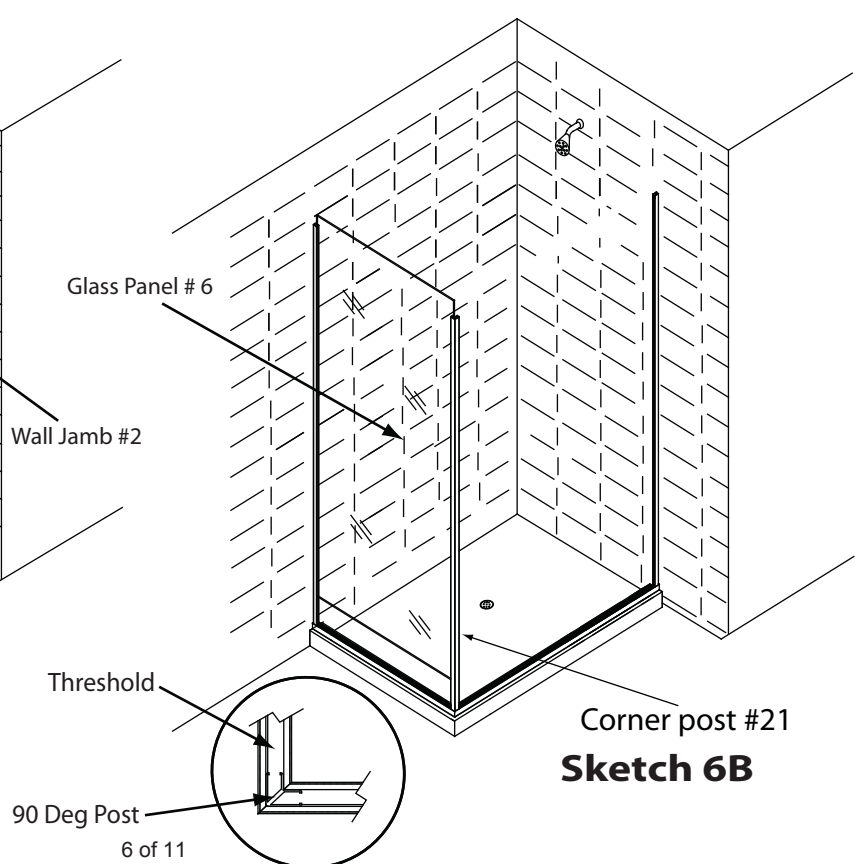

Sketch 6B

7

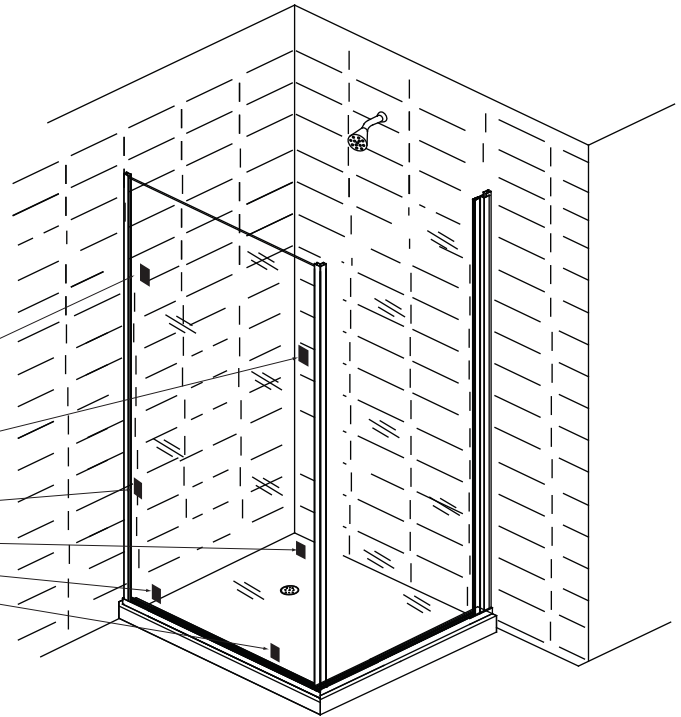
Cut (2) 1" pieces of horizontal glazing vinyl #15 and (4) 1" pieces of vertical vinyl #14. Tuck 1" cuts of vinyl into Threshold #1, Wall Jamb #2 and Corner Post #21 to secure glass panels in place. See **Sketch 7A** for details.

This is a temporary setup. 1" cuts must be replaced later with continuous strips of glazing vinyl.

Make sure Corner Post #21 is plumb on each side and space between corner post and wall jamb is the same on the bottom and top.

1" Cuts of Glazing Vinyl.


Note: Glass is engineered to fit evenly into wall Jamb#2 and Corner Post # 21.
Please set accordingly.



Sketch 7 A

8

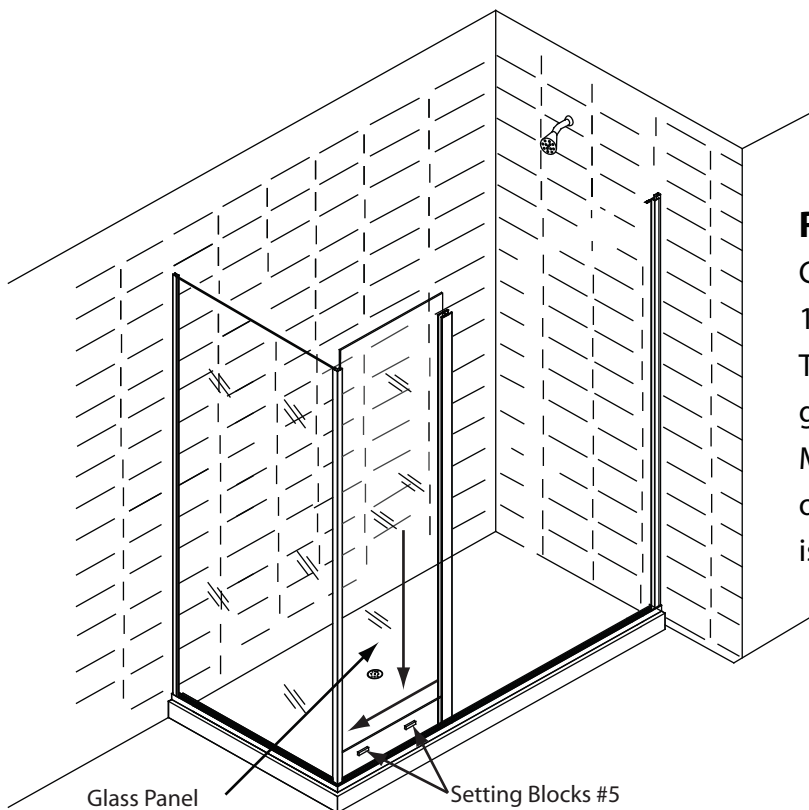Place Setting Blocks # 5 with Arch Facing Down into Threshold. Place Front Glass Panel spaced evenly into position as shown in **Sketch 8 A**.



Glass Panel

Setting Blocks #5


Sketch 8A

Repeat step 7 with Front Corner Glass Panel

Cut (2) 1" pieces of horizontal glazing vinyl #15 and (4) 1" pieces of vertical vinyl #14. Tuck 1" cuts of vinyl into Threshold #1, Corner Post #21 and "H" Post #7 to secure glass panels in place.

Make sure Corner Post #21 and "H" post #7 are plumb on each side and space between them and wall jamb is the same on the bottom and top.

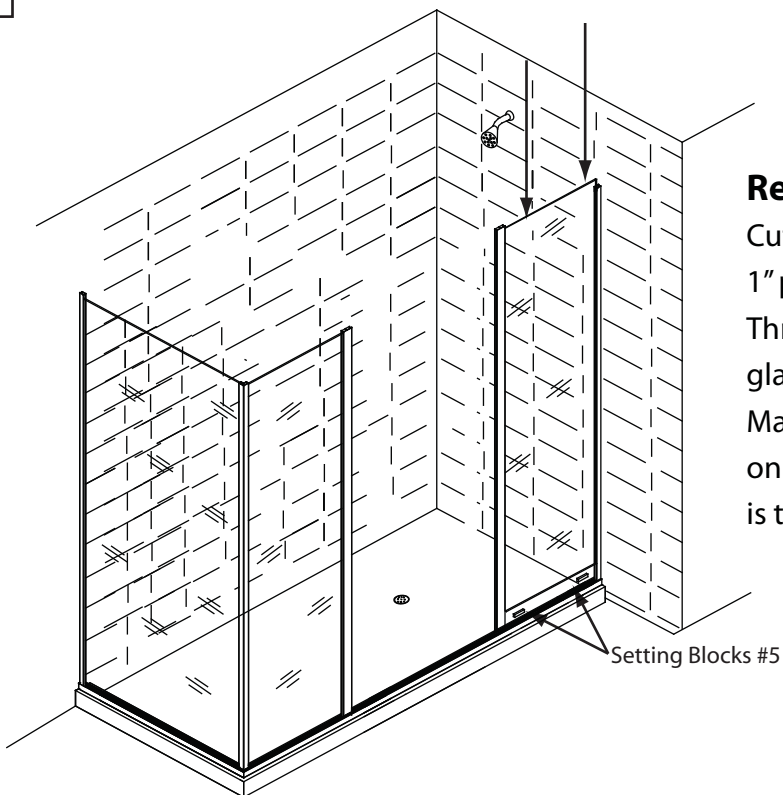9



Sketch 9

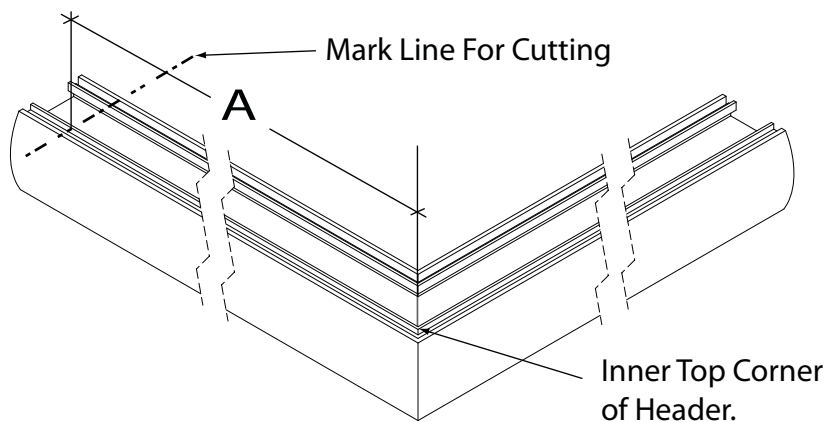
Repeat step 7 with Front Wall side Glass Panel

Cut (2) 1" pieces of horizontal glazing vinyl #15 and (4) 1" pieces of vertical vinyl #14. Tuck 1" cuts of vinyl into Threshold #1, Wall Jamb #2 and "H" Post #7 to secure glass panels in place.

Make sure "H" post #7 is plumb on each side and space between "H" post and wall jamb is the same on the bottom and top.


10

Installation of Header.



Sketch 9

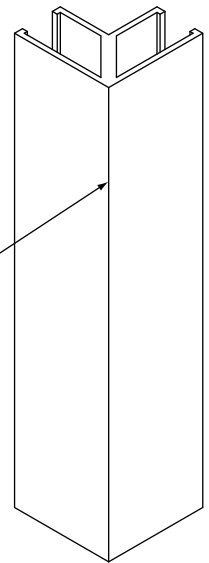Middle Rib of
Corner post #21



Measure the dimension "A" from the middle rib of left Corner post #21 to the left wall. Mark size "A" on the header holding tape-measure on inner top corner of the header.

See **Sketch 9** for detail.

Cut the excess header.

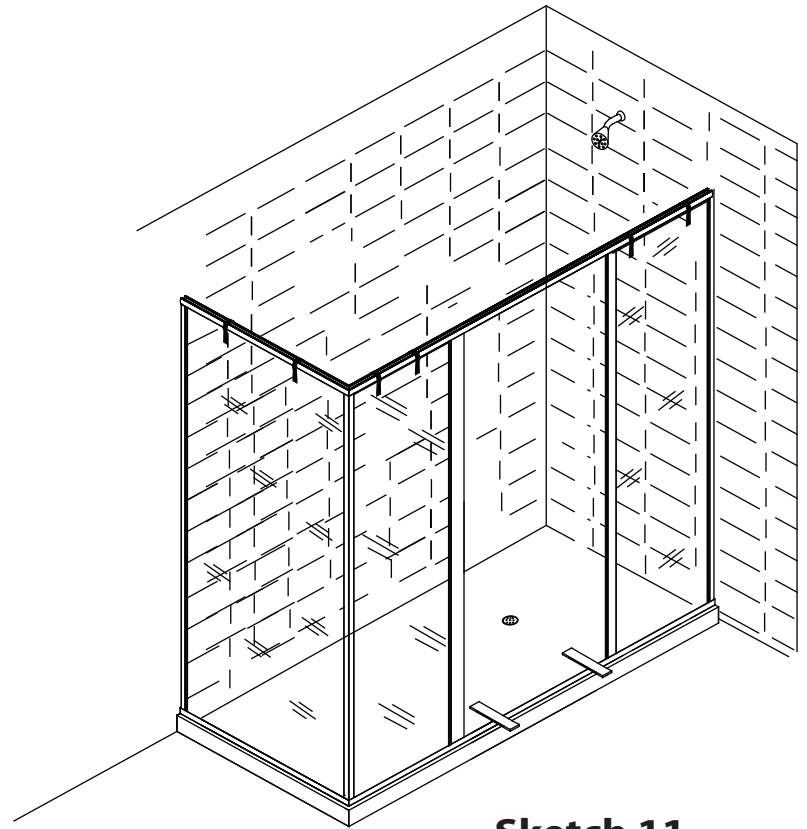
Repeat this step for right side.

File each end of cut header to remove any sharp edges.

11




Set the 2 piece Header #8 over the glass panels and metal extrusions. Make sure Wall Jamb #2 , Corner Post #21 and "H" Post #7 penetrate into Header #8. Secure the header with a few strips of masking tape. Later to be replaced with Screws #11. Set Wooden shims on the Threshold as is shown in **Sketch 11**

Shims are to protect the edges of glass door
Be careful not to strike or chip glass.
Glass can break if not handled properly.

**Sketch 11**



12 With Hinge Jamb # 16 in open position slide Hinge Jamb #16 over (**Sketch 12**)

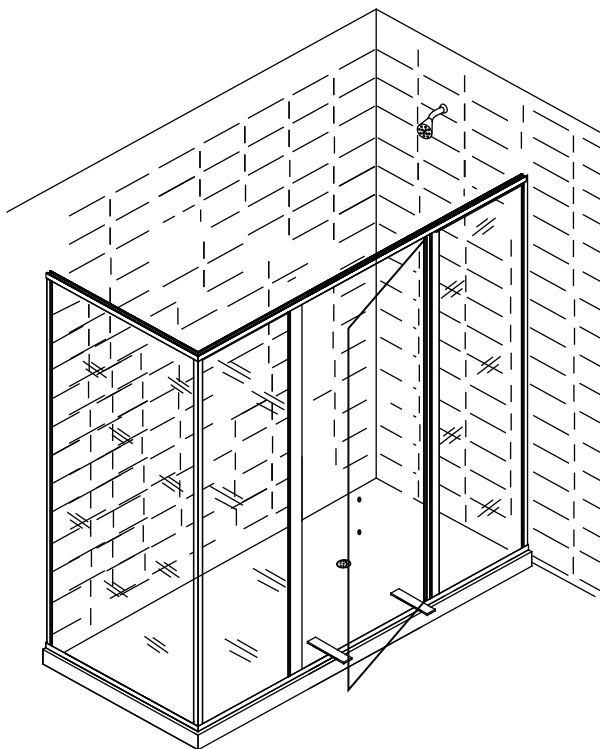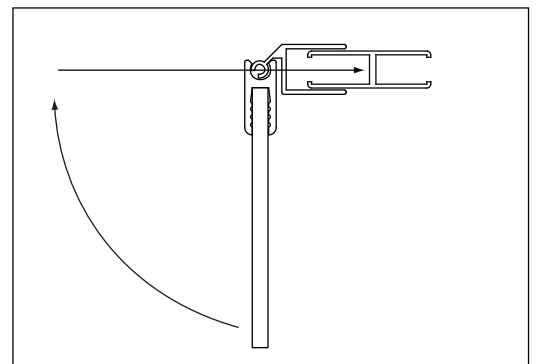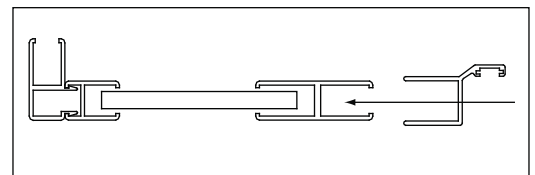"H" Post #7 , close the door and set glass on wooden shims. (**Sketch 12A**). Make sure that there is sufficient space between vertical extrusions for glass to fit. Secure the door position on Wall Jamb#2. Slide Strike Jamb#13 over opposite "H"-post #7. Adjust the width of the front opening by moving Hinge Jamb #16 and Strike Jamb #13 left and right. Make sure Door will swing freely without hitting any extrusion.


**Sketch 12A****Sketch 12****Sketch 12B**

13

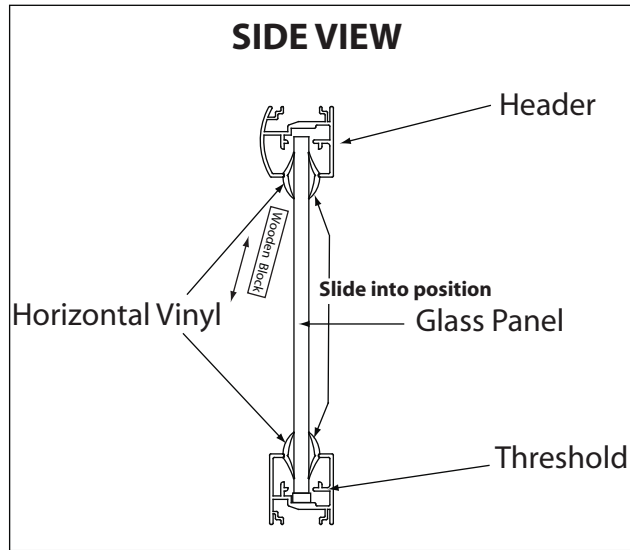
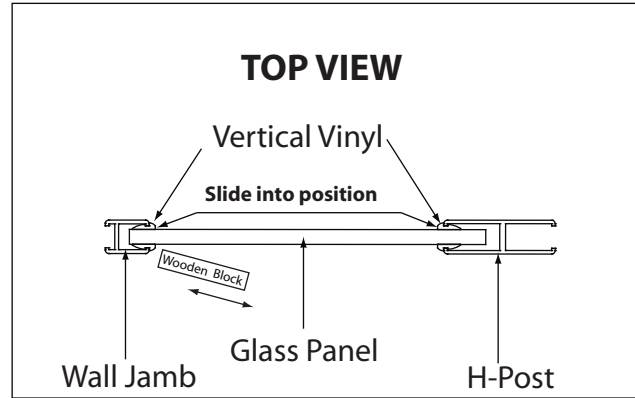
Remove Temporary 1" cuts of Glazing Vinyls.
 Insert Horizontal Vinyl # 15 and Vertical Vinyl # 14
 as shown in **Sketch 13A and 13B** and tuck them in.

**Sketch 13A****Sketch 13B**

NOTE: A light spray of Glass Cleaner on the glass will help the vinyl slide into position. Flat square block of wood can be used to tap in vinyl.


**14**

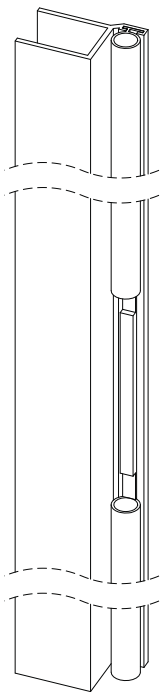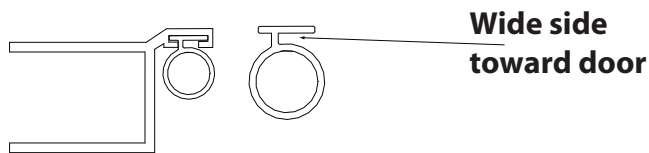Install D-Handle And #9 Clamp-On Metal Pad.
 Wrap Rubber Pad around the edge of Door Glass.
 Positioned In The Middle Of Handle. Gently tap on #18 Clamp-on Metal Pad to Door Glass
 Re-Adjust the height of #10 Slide-In Magnet By Cutting #6 Bulb Seal.

**Sketch 14B****Sketch 14A**

Note: Take care when placing
 Clamp on Door Magnet.

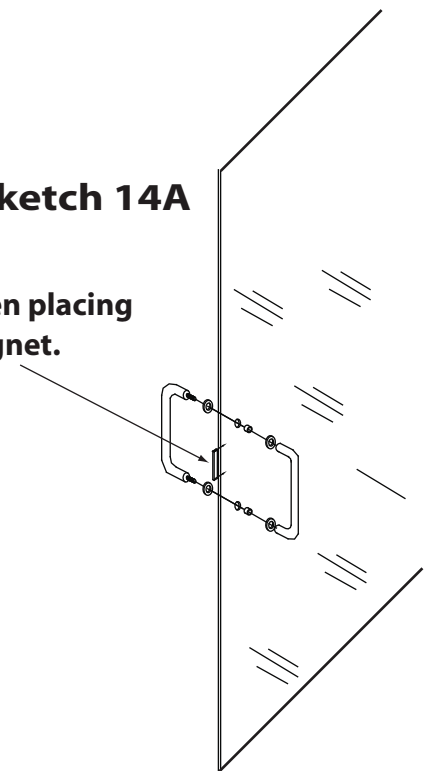Position magnet #10 In the middle of Strike Jamb #13.
 Measure the distance from magnet to top of Strike Jamb
 and from Bottom of Magnet#10 to bottom of Strike Jamb #13.
 Cut the Bulb Vinyls #6 to size. Slide Bottom Piece of
 Bulb vinyl #6 into Strike Jamb #13 first, followed by
 Magnet #10 and the top Piece of Bulb Vinyl #6.
 Please note that off set on Bulb Vinyl must be directed
 toward the door. See **SKETCH 14B** for details.




Header and Threshold Inserts.

15

With door glass in open position measure from Strike Jamb #13 to Hinge Jamb #16 as shown on **Sketch 15A (Size A)**.

Cut Inserts #12 to size. Insert into Header #8 and Threshold #1.

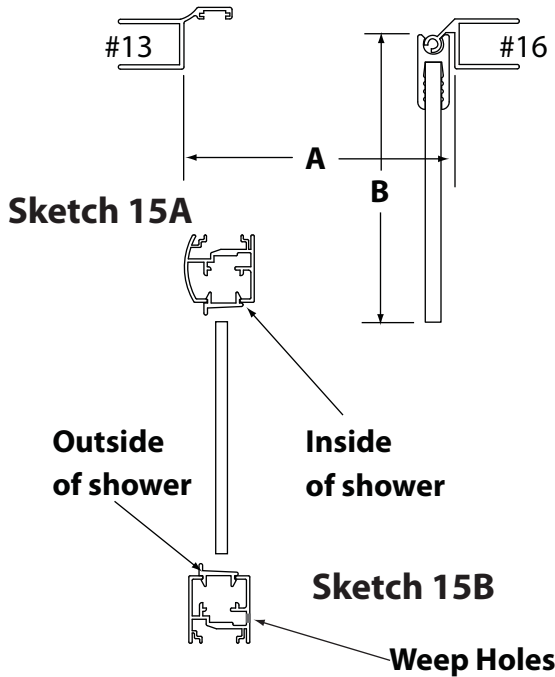See **Sketch 15B** for details. Insert will snap into position when pushed with a slight angle.




Bottom door deflector.

Measure from the Hinge Stile #19 to the edge of the door glass.

Sketch 15A (Size B). Cut Deflector #17 to size. Notch Deflector #17 to fit around the extrusions.

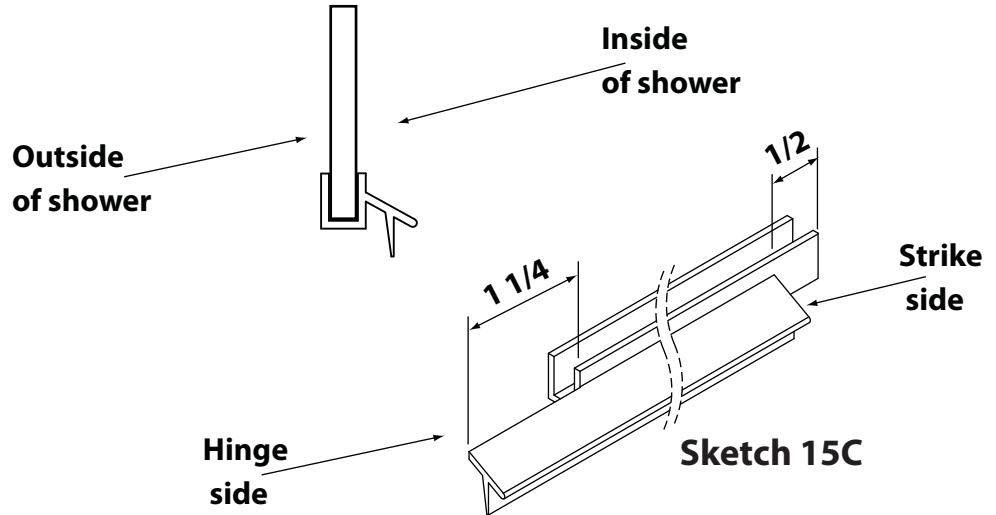Slide Deflector #17 on the Bottom of the door as shown in **Sketch #15C**.



16

After checking your shower enclosure installation, Clean tile and extrusions to properly apply silicone.

Apply Silicone Sealant as shown

It is essential that Silicone Sealant be applied to complete perimeter inside and outside as shown in **Sketch 16**. When applying Silicone Sealant to threshold, it is important not to cover WEEP HOLES with Silicone Sealant to ensure proper drainage.

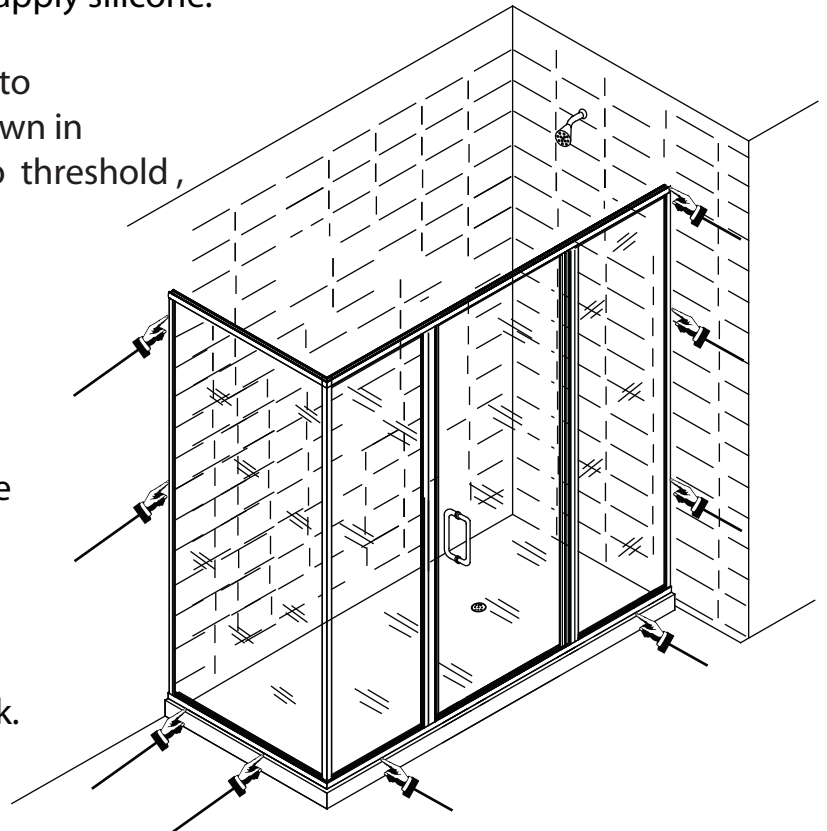Please note : After applying Silicone Sealant, Shower Enclosure must not be used for 24 hours to allow the sealant to set properly. If Silicone Sealant does not cure properly, shower enclosure may leak.


Sketch 16