

MATRIX Frameless Stall Shower Enclosure

XS-48T-38, XS-54T-38, XS-60T-38, XS-66T-38




GLASSCRAFTERS INC.

All Units are available in Polished Stainless Steel, Brushed Stainless Steel or Iron-Black (add "PSS", "BSS", "IBK" to model code)

Cleartek™ (Low-iron) glass is a super clear glass with significantly less color than standard clear glass, but is not color free. The larger the panel, the more noticeable the tint in the glass, especially on the edges.

Acceptable Out Of Square (OOS) conditions:

For bottom base opening, 3/8" OOS from left to right
 For wall that accepts stationary panel, up to 5/8" OOS
 For wall that accepts door panel, up to 3/8" OOS

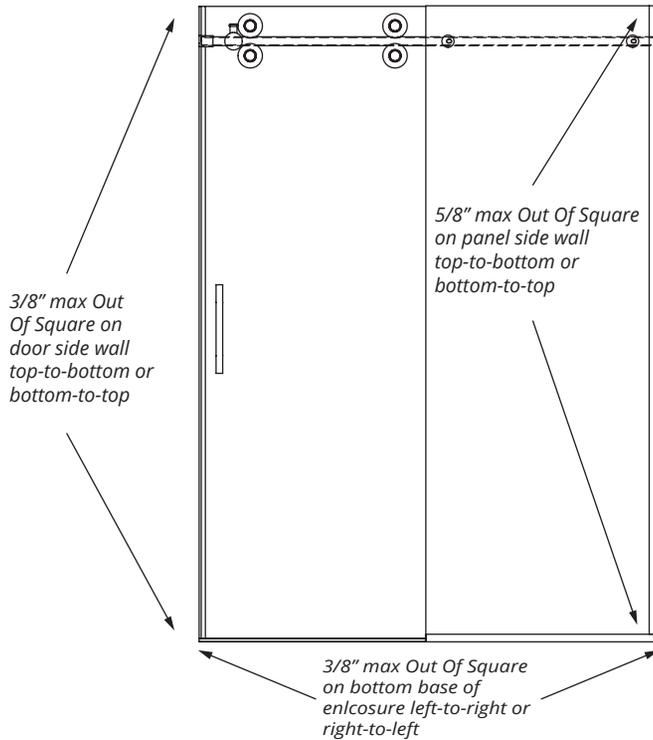


Standard Features:

- 1" stainless steel rod.
- Sliding door technology: 4 stainless steel rollers with concealed ball bearings.
- 12" standard ladder handle. (8" center to center hole location)
- U-channel at base of panel.
- Clear tempered 3/8" glass.
- Acrylic water tight curb dam.

Design and ordering for left hand or right hand door is not required as parts are reversible.



- Cleartek™ (Low-Iron) or Standard Clear Glass
- Protective Glass Coating

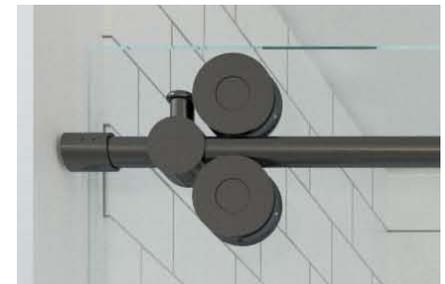

SHOWER ENCLOSURE MODELS: (All Stall units are 76" high)

- XS-48T-38 45" to 48" opening with 22" to 25" walk through
- XS-54T-38 51" to 54" opening with 25" to 28" walk through
- XS-60T-38 57" to 60" opening with 25" to 28" walk through
- XS-66T-38 63" to 66" opening with 28" to 31" walk through

GLASSCRAFTERS, INC.
 193 Veterans Blvd. Carlstadt, NJ 07072
 1+ (888) 683-1362 (F) 1+ (201) 525-1117
 sales@glasscraftersinc.com

Custom Designs for Luxury Homes

MATRIX Frameless Stall Shower Enclosure


XS-48T-38, XS-54T-38, XS-60T-38, XS-66T-38

All Units are available in Polished Stainless Steel, Brushed Stainless Steel or Iron-Black (add "PSS", "BSS", "IBK" to model code)




GLASSCRAFTERS INC.


Detail — Side View

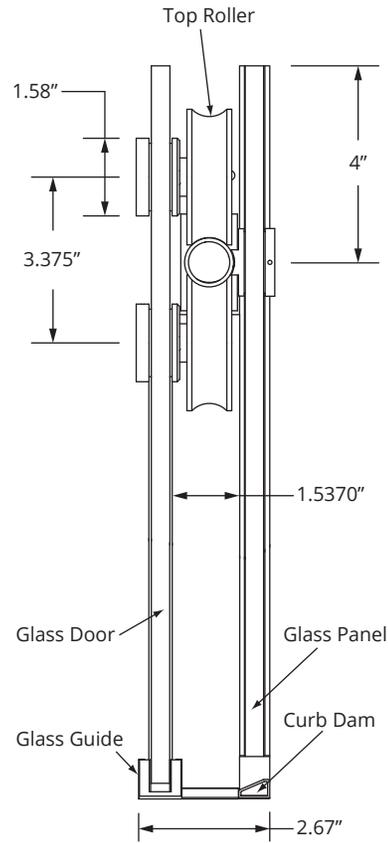

Detail — Top View, Right Side

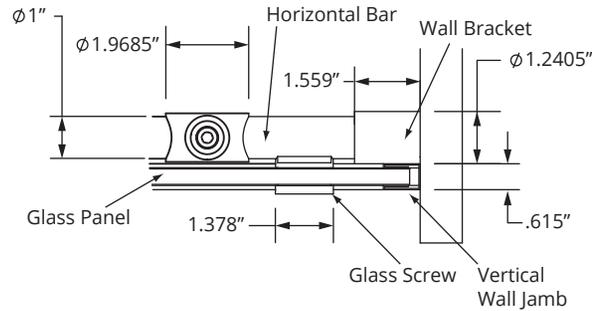

Detail — Top View, Left Side

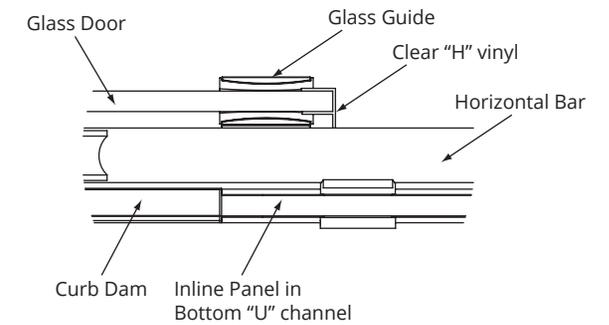



DECORATIVE HARDWARE FINISH OPTIONS



GLASS & HARDWARE



Cleartek™ (Low-iron) glass is a super clear glass with significantly less color than standard clear glass, but is not color free. The larger the panel, the more noticeable the tint in the glass, especially on the edges.

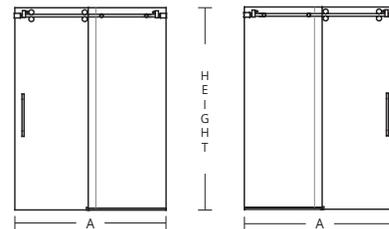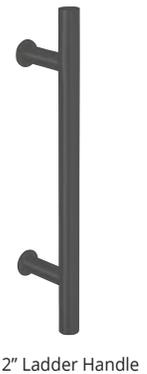


Height is 76" — 3/8" glass

Model Number	Width (A) Min-Max	Overlap Max - Min	Walk Through Min-Max
XS-48T-38, BSS, PSS, IBK	45" to 48"	4" to 1"	22" to 25"
XS-54T-38, BSS, PSS, IBK	51" to 54"	4" to 1"	25" to 28"
XS-60T-38, BSS, PSS, IBK	57" to 60"	4" to 1"	25" to 28"
XS-66T-38, BSS, PSS, IBK	63" to 66"	4" to 1"	28" to 31"

FOR BEST RESULTS Glasscrafters recommends the installation be performed by a trained installer.

WARNING: TO INSTALL ON CAST IRON, FIBERGLASS, ACRYLIC OR RESIN SHOWER BASE Check with the tub or shower base manufacturer to determine the tooling required.

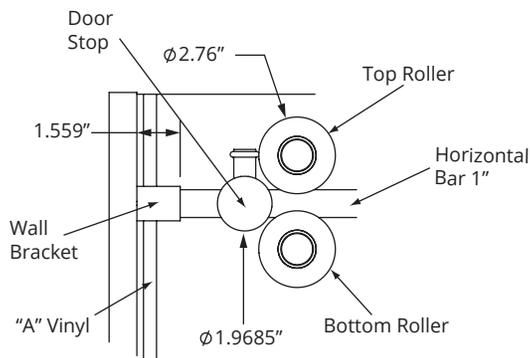

INSTALLING THESE UNITS REQUIRES 2 PERSONS

GLASSCRAFTERS, INC.
193 Veterans Blvd. Carlstadt, NJ 07072
1+ (888) 683-1362 (F) 1+ (201) 525-1117
sales@glasscraftersinc.com
Custom Designs for Luxury Homes